

SPD for Explosive Environments  
**RayDat Ex-2 Series**  
**D1 • C1 • C2 • C3**

**SMH-xxEx Series**



IEC/EN Category: D1/C1/C2/C3  
 Mode of Protection: Longitudinal, Transverse  
 Coarse Protection: 3 Terminal GDT  
 Voltages: 12, 24V DC  
 Maximum Operating Voltage:  $U_c$ : 15, 28VDC  
 Frequency Range: 3MHz  
 Surge Discharge Ratings:  $I_n$ : 5kA,  $I_{max}$ : 10kA,  $I_{imp}$ : 1kA  
 Series Load Current: 500mA  
 Enclosure: DIN 43880 1/3TE, DIN Rail Mount  
 Terminals: Stranded to 4mm<sup>2</sup>  
 Housing: Modular Design  
 Compliance: IEC/EN 61643-21



The RayDat Ex-2 Series is intended to provide protection to low voltage signal and data circuits located in potentially explosive environments.

It is intended for use on inherently safe circuits in accordance with ATEX directive. The protection module should be located as close to the end-user equipment being protected, as possible.

The circuit consists of a multi-stage protector providing both common (longitudinal) mode and differential (transverse) mode protection.

Coarse protection is provided using a three terminal gas discharge tube while fine protection is provided using a high speed bi-directional silicon stage. Care is taken to ensure coordination between these two stages without voltage or surge current blind spots occurring.

**Technical Data**

Ex-2 Series		12V	24V
<b>Type</b>			
Intrinsic Safety Parameters			
Explosion Protected		II 1G Ex ia IIC T* Ga (-40 °C ≤ Ta ≤ +°C)	
IEC Type Examination Certificate		Baseefa	Baseefa 15ATEX0028X Ex
		IEC	IECEx BAS 15.0012X
Maximum Input Voltage	$U_i$	16V	29V
Maximum Input Current	$I_i$	500mA	
Maximum Input Power	$P_i$	2W	
Maximum Internal Capacitance	$C_i$	10nF	
Maximum Internal Inductance	$L_i$	0.11mH	
Number of Protected Pairs		1 (2 Conductors)	
<b>Electrical</b>			
Nominal Operating Voltage (DC)	$U_n$	12V	24V
Maximum Continuous Operating Voltage (DC)	$U_c$	15V	28V
Rated Load Current at 25°C	$I_L$	500mA	
Nominal Discharge Current (8/20µs)	$I_n$	5kA	
Maximum Discharge Current (8/20µs)	$I_{max}$	10kA	
D1 Impulse Current (10/350µs)	$I_{imp}$	1kA	
Residual Voltage at 5kA (8/20µs)	$U_{res}$	< 145V	
Rated Spark Overvoltage	(Line-Line)	16-21V	31-37V
	(Line-Ground)	584-876V	
Response Time Overvoltage Protection	$t_A$	< 1ns	
Insulation Resistance at $U_c$	$R_{iso}$	≥ 15MΩ	≥ 28MΩ
Insulation Resistance at 500VDC	(Line-Ground)	> 1GΩ	
Serial Resistance per Path	R	< 1Ω	
Transverse Capacitance	C	< 10pF	
Cut-off Frequency	$f_G$	3MHz	
<b>Mechanical</b>			
Terminal Cross Section Multi-strand		4mm <sup>2</sup>	
Terminal Screw Torque		0.5Nm	
Degree of Protection IEC/EN 60529		IP 20	
Housing Material		Thermoplastic; Beige; Extinguishing Degree V-0	
Mounting IEC/EN 60715		35mm DIN Rail	
<b>Order Information</b>			
Order Code		12V	24V
Ex-2-xx		704 120	704 121

Input Power $P_i$	Temperature Class	Maximum Ambient
$P_i=1W$	T6	50 °C
$P_i=1.3W$	T5	55 °C
$P_i=2W$	T4	60 °C


$U_o=U_i$   
 $I_o=I_i$   
 $P_o=P_i$

## RayDat EX-2 Series


### Internal Configuration

#### Legend

- DB Diode Block
- F Fuse
- GDT Gas Discharge Tube
- L Inductor
- PG Protective Grounding
- R Resistor

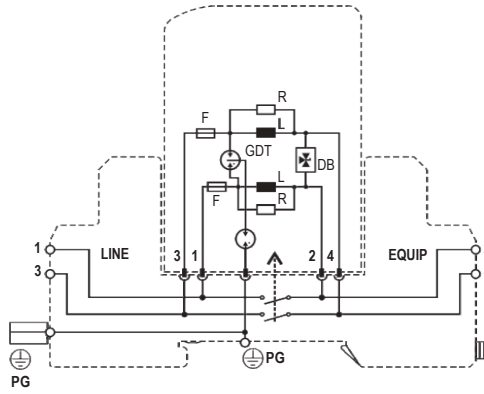

### Dimensions & Packaging

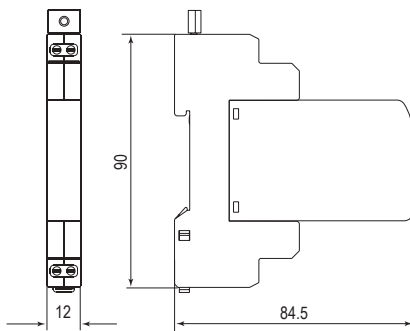

Ex-2 Series	12V	24V
<b>Dimensions</b>		
Weight per Unit	88 g	
Dimensions DIN 43880	2/3 TE	
Packaging Dimensions (Single Unit)	87 × 15 × 102 mm	
Minimum Package Quantity	15 pieces	