

Compact Single Pole SPD
ProTube B 100
 Class I • Class II • Type 1 • Type 2



Location of Use: Main Distribution Boards
 Network Systems: TT
 Mode of Protection: N-PE
 Surge Ratings: $I_{imp} = 100\text{ kA (10/350}\mu\text{s)}$
 $I_n = 100\text{ kA (8/20}\mu\text{s)}$
 IEC/EN Category: Class I, II / Type 1, 2
 Protective Elements: High Energy GDT
 Housing: Compact Design
 Compliance: IEC 61643-11:2011
 EN 61643-11:2012

Technical Data

ProTube B 100/xxx		255
Electrical		
Nominal AC Voltage (50/60 Hz)	U_o	230V
Maximum Continuous Operating Voltage (AC)	U_c	255V
Nominal Discharge Current (8/20 μs)	I_n	100 kA
Maximum Discharge Current (8/20 μs)	I_{max}	100 kA
Impulse Discharge Current (10/350 μs)	I_{imp}	100 kA
Specific Energy	W/R	2.5 MJ/ Ω
Charge	Q	50 As
Voltage Protection Level	U_p	< 1.5 kV
Follow Current Interrupt Rating	I_{fi}	100 A _{RMS}
Response Time	t_A	< 100 ns
TOV withstand 200ms	U_T	1200V/300A
Number of Ports		1
Mechanical & Environmental		
Temperature Range	T_a	-40 °F to +185 °F [-40 °C to +85 °C]
Permissible Humidity	RH	5%...95%
Terminal Screw Torque	M_{max}	26.5 lbf-in [3.0 Nm]
Conductor Cross Section (max)		2 AWG (Solid, Stranded) / 4 AWG (Flexible) 35mm ² (Solid, Stranded) / 25mm ² (Flexible)
Mounting		35mm DIN Rail, EN 60715
Degree of Protection		IP 20
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0
Order Information		
Order Code		255
ProTube B 100/xxx		56.0511


ProTube B 100

Internal Configuration


Legend

N Neutral

PE Protective Earth



Dimensions & Packaging [mm]

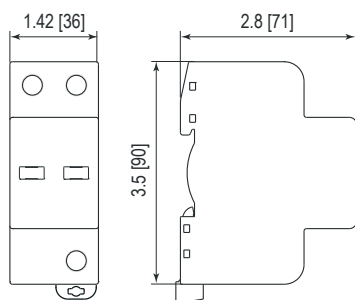

Dimensions & Packaging

ProTube B 100/xxx		255
Single Unit Weight	pounds [grams]	.529 [240]
Single Unit DIN 43880 Dimension		2 TE
Packaging Dimensions (H×W×L)		4.2 × 3 × 1.6" [109 × 77 × 42 mm]
Minimum Order Quantity		7 Units

inches
[mm]

Information contained in this document is subject to change at any time without notice.

